

TUCK


Available in four interlinkable lengths, Tuck stows neatly beneath cabinetry or shelving to provide luminous, customizable illumination, thanks to its capacitive touch dimming feature with last state memory.



See page 4
for details.



TUCK

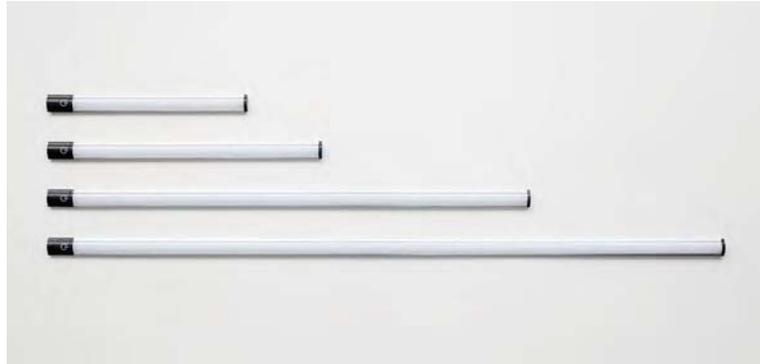


Finish



Silver with black endcaps

Dimensions

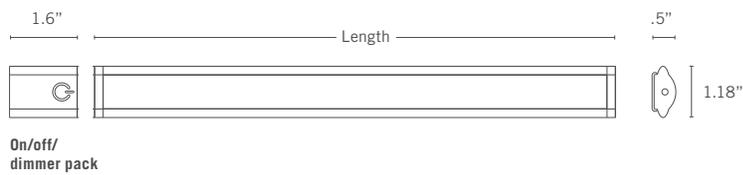

	Actual Length*	Suggested Shelf Size
12"	13.6"	< 24"
17"	18.6"	24"-36"
31"	32.6"	42"-48"
44"	45.6"	54"-60"

* Actual length represents the fixture plus the on/off/dimmer pack.

TUCK

Features

- Interlinkable
- Master control
- Automatic shut-off after 12 hours (± 15 mins.)
- Continuous dimming from 100%–15% with last state memory (when powered)

Specifications

Lengths:	12", 17", 31", 44"
Power consumption:	see chart below
Color temperature:	3500K
Luminosity:	see chart below
Color rendering index:	85 CRI
Rated lifespan:	> 52,000 hours
Number of LEDs:	see chart below
Power supply:	9' (18W) or 11' (65W) black cord

	# of LEDs	Lumens	Wattage	System
12"	36	315	4.4	5.0
17"	54	457	5.6	6.4
31"	90	914	10.3	11.89
44"	132	1289	14.3	16.23

Sustainability Notes

- Made with fully-recyclable anodized aluminum and plastic
- Energy-saving features such as auto shut-off and dimming included
- Lower power consumption
- Mercury-free
- Potential LEED points: **Interior Lighting** (possible 2 points), **Interior Lighting Controls** (possible 1 point). For more LEED information please visit <https://new.usgbc.org/leed-v41>

Certifications



ETL listed: compliant to UL 153 & CSA C22.2 No. 250.4; FCC Part 15 Class B; CEC Title 20

Warranty

The Tuck fixture is warranted for a period of 5 years. Tuck power supplies are warranted for 1 year.

California Residents



WARNING: This product may expose you to chemicals including DEHP and/or lead which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

TUCK


Photometric Data

Footcandle outputs measured at 18" from the work surface.

12" Fixture	18"	12"	6"	CL	6"	12"	18"	17" Fixture	18"	12"	6"	CL	6"	12"	18"
12"	5	10	16	19	16	10	5	12"	9	15	22	26	21	15	8
6"	7	17	30	39	31	17	7	6"	12	27	44	53	44	26	12
CL	9	21	41	54	41	21	9	CL	15	34	60	73	59	34	15
6"	7	17	31	38	31	17	7	6"	12	27	44	53	44	27	12
12"	5	10	16	19	16	10	5	12"	9	15	22	27	23	15	9

31" Fixture	18"	12"	6"	CL	6"	12"	18"	44" Fixture	18"	12"	6"	CL	6"	12"	18"
12"	12	21	32	37	31	21	11	12"	32	38	42	45	43	38	31
6"	18	38	63	77	63	37	18	6"	60	76	82	84	82	73	58
CL	21	49	87	105	86	49	21	CL	79	100	109	111	109	100	78
6"	18	38	64	77	64	38	18	6"	60	78	85	87	85	77	60
12"	12	21	32	38	33	21	12	12"	33	42	45	47	45	41	33

Accessories



Adhesive Horizontal Cord Manager

Adhesive cord managers adhere to surfaces to horizontally manage cords with a clasping cord guide. Included with every fixture purchase. Available in silver only. Qty. 2.



Magnetic Horizontal Cord Manager

Magnetic cord managers magnetically mount to metal to horizontally manage cords with a feeder slot. Available in chrome finish. Qty. 2.



Panel Clip Cord Manager

Panel clips mount by pinching into panel slots to create a loop to manage cords through. Available in black only. Qty. 2.

TUCK

Specifying Notes

- Stand alone fixtures include one light fixture, one on/off/dimmer pack, one 18-watt power supply, magnet and screw mounts and two adhesive horizontal cord managers.
- Starter fixtures include one light fixture, one on/off/dimmer pack, one 65-watt power supply, magnet and screw mounts and two adhesive horizontal cord managers.
- Adder fixtures include one light fixture, one 18" interlink cord, magnet and screw mounts and two adhesive horizontal cord managers.
- All interlinked fixtures are controlled by the on/off/dimmer pack on the starter fixture.
- Additional cord managers are available for purchase.
- A 65-watt power supply is required when interlinking.
- Total interlinked system wattage cannot exceed 54 watts. Refer to the interlinking combination chart at right for acceptable combinations.
- Do not interlink with any other fixture family.

Interlink Combinations

12"	17"	31"	44"
6	0	0	0
5	1	0	0
5	0	0	0
4	2	0	0
4	1	0	0
4	0	1	0
4	0	0	0
3	2	0	0
3	1	1	0
3	1	0	0
3	0	1	0
3	0	0	1
3	0	0	0
2	3	0	0
2	2	1	0
2	1	1	0
2	0	2	0
2	0	0	1
1	4	0	0
1	3	0	0
1	2	1	0
1	2	0	1
1	1	1	0
1	1	0	1
0	4	0	0
0	3	1	0
0	3	0	0
0	2	1	0
0	2	0	1
0	1	2	0
0	1	1	1
0	1	0	1
0	0	3	0
0	0	2	0
0	0	1	1
0	0	0	2

TUCK

List Prices

CODE	DESCRIPTION	PRICE
STAND ALONE FIXTURES		

Select length:

TUCK.12.SGL.18PS.LC	12" stand alone fixture	\$205
TUCK.17.SGL.18PS.LC	17" stand alone fixture	\$215
TUCK.31.SGL.18PS.LC	31" stand alone fixture	\$340
TUCK.44.SGL.18PS.LC	44" stand alone fixture	\$450

STARTER FIXTURES		
-------------------------	--	--

Select length:

TUCK.12.DCP.60PS.LC	12" starter fixture	\$230
TUCK.17.DCP.60PS.LC	17" starter fixture	\$240
TUCK.31.DCP.60PS.LC	31" starter fixture	\$365
TUCK.44.DCP.60PS.LC	44" starter fixture	\$475

ADDER FIXTURES		
-----------------------	--	--

Select length:

TUCK.12.DCA.OPS.LC	12" adder fixture	\$155
TUCK.17.DCA.OPS.LC	17" adder fixture	\$165
TUCK.31.DCA.OPS.LC	31" adder fixture	\$290
TUCK.44.DCA.OPS.LC	44" adder fixture	\$400

SERVICE KITS		
---------------------	--	--

INTERLINKING

ICT18	18" interlink cord	\$10
--------------	--------------------	------

POWER SUPPLIES

PS18.B	18-watt, black, 9' cord, straight plug	\$50
PS60.B	65-watt, black, 11' cord, straight plug	\$75

CORD MANAGERS

CMAD	adhesive horizontal cord manager	\$5
CMMM	magnetic horizontal cord manager	\$10
CMPC	panel clip cord manager	\$5

How to order:

Specify Model#

Example: For a 17" starter to interlink with a 44" adder, order: **TUCK.17.DCP.60PS.LC** and **TUCK.44.DCA.OPS.LC**